
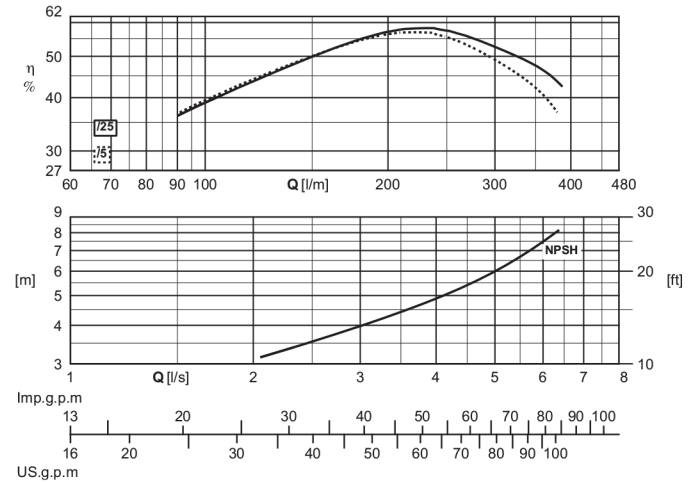


Type Type Tipo	$\phi$ max	Weight Poids Peso	A	B	C	D	E	F
			[mm]					
E4XPD60/5+MCH42	98	15,6	1005	558	447	93	96	G2
E4XPD60/7+MCH43	98	18,2	1169	694	475	93	96	G2
E4XPD60/10+MCH44	98	22,4	1440,5	925,5	515	93	96	G2
E4XPD60/13+MCH455	98	27,1	1669,5	1129,5	540	93	96	G2
E4XPD60/18+MCR475	98	35,7	2182	1497	685	93	96	G2
E4XPD60/25+MCR410	98	43,2	2770,5	2000,5	770	93	96	G2

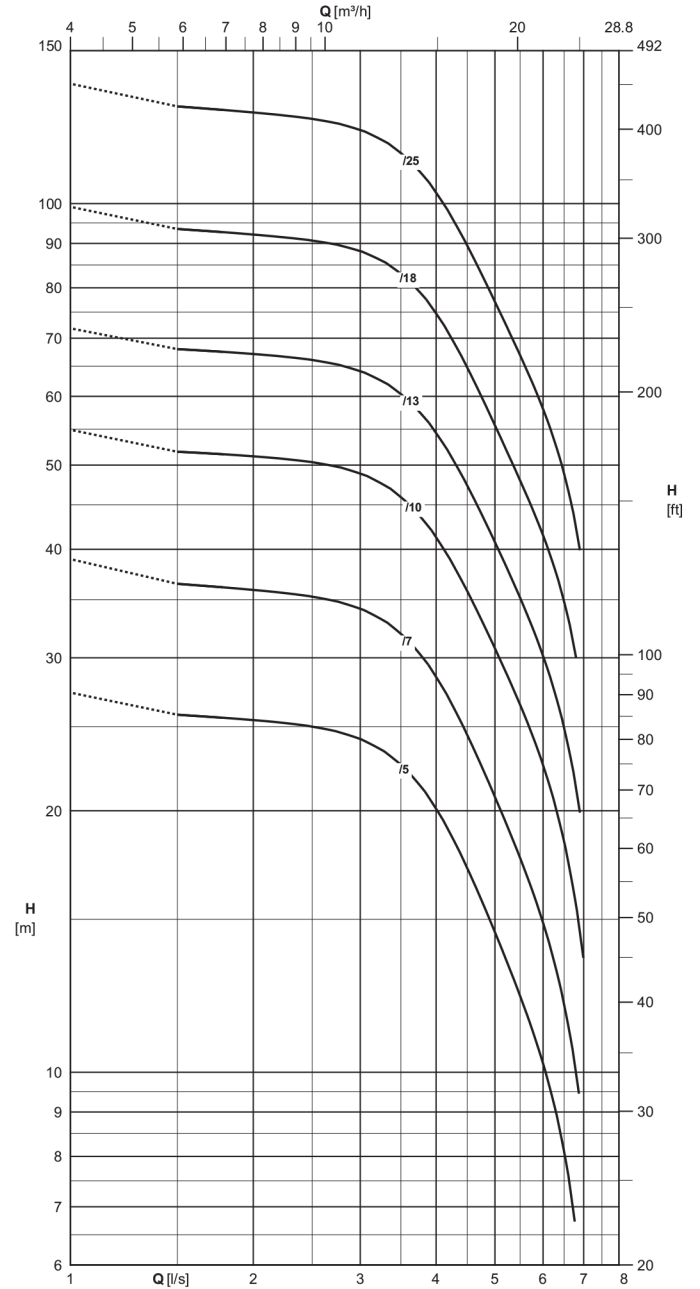

The hydraulic performance characteristics are guaranteed as conforming to standard UNI/ISO 9906 Grade 3B.

Les caractéristiques hydrauliques de fonctionnement sont garanties conformes à la norme UNI/ISO 9906 Niveau 3B.

Le caratteristiche di funzionamento vengono garantite secondo la norma: UNI/ISO 9906 Grado 3B.