
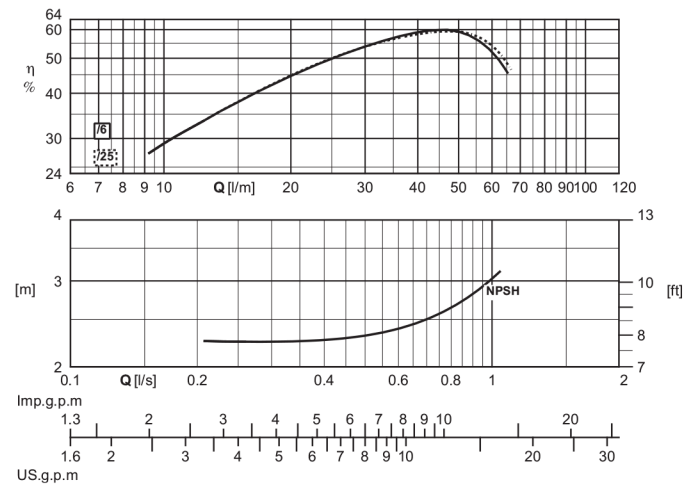


Type Type Tipo	ϕ max	Weight Poids Peso	A	B	C	D	E	F
			[mm]					
E4XED25/6+MC405	98	10,6	619,5	299,5	320	93	96	G1 1/4
E4XED25/9+MC4075	98	11,7	699,5	359,5	340	93	96	G1 1/4
E4XED25/12+MC41	98	13	759,5	419,5	340	93	96	G1 1/4
E4XED25/18+MCH415	98	15,2	959,5	539,5	420	93	96	G1 1/4
E4XED25/25+MCH42	98	17,3	1154	707	447	93	96	G1 1/4
E4XED25/31+MCK43	98	19,9	1302	827	475	93	96	G1 1/4
E4XED25/37+MCK43	98	21	1422	947	475	93	96	G1 1/4

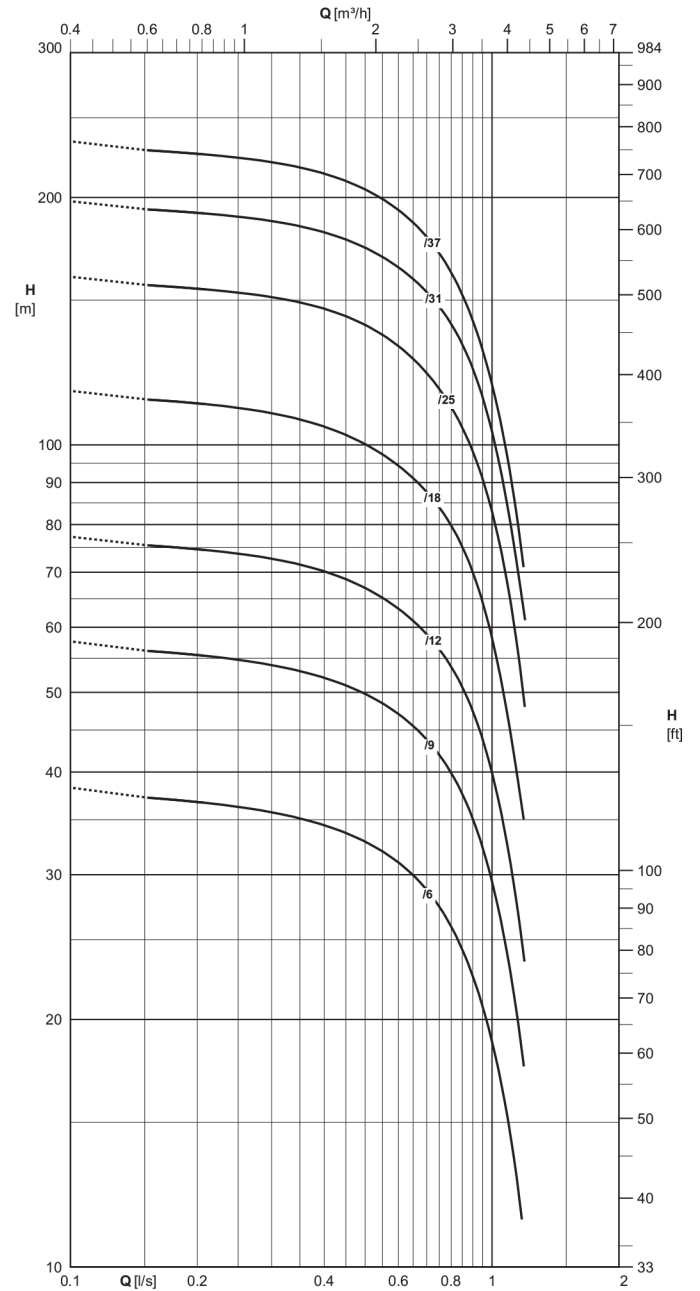

The hydraulic performance characteristics are guaranteed as conforming to standard UNI/ISO 9906 Grade 3B.

Les caractéristiques hydrauliques de fonctionnement sont garanties conformes à la norme UNI/ISO 9906 Niveau 3B.

Le caratteristiche di funzionamento vengono garantite secondo la norma: UNI/ISO 9906 Grado 3B.