
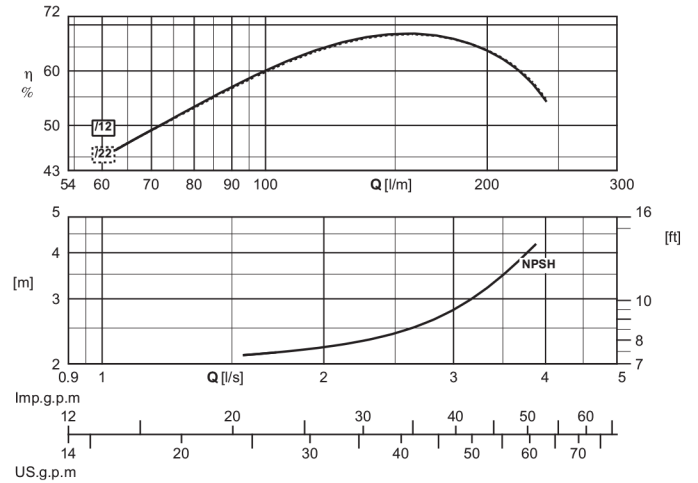


Type Type Tipo	Ø max	Weight Poids Peso	A	B	C	D	E	F
	[mm]							
E4XED50/6+MCH415	98	14,1	858,5	438,5	420	93	96	G2
E4XED50/8+MCH42	98	15,4	970,5	523,5	447	93	96	G2
E4XED50/12+MCH43	98	18,5	1196	721	475	93	96	G2
E4XED50/16+MCH44	98	22,3	1406	891	515	93	96	G2
E4XED50/22+MCH455	98	27,5	1686	1146	540	93	96	G2

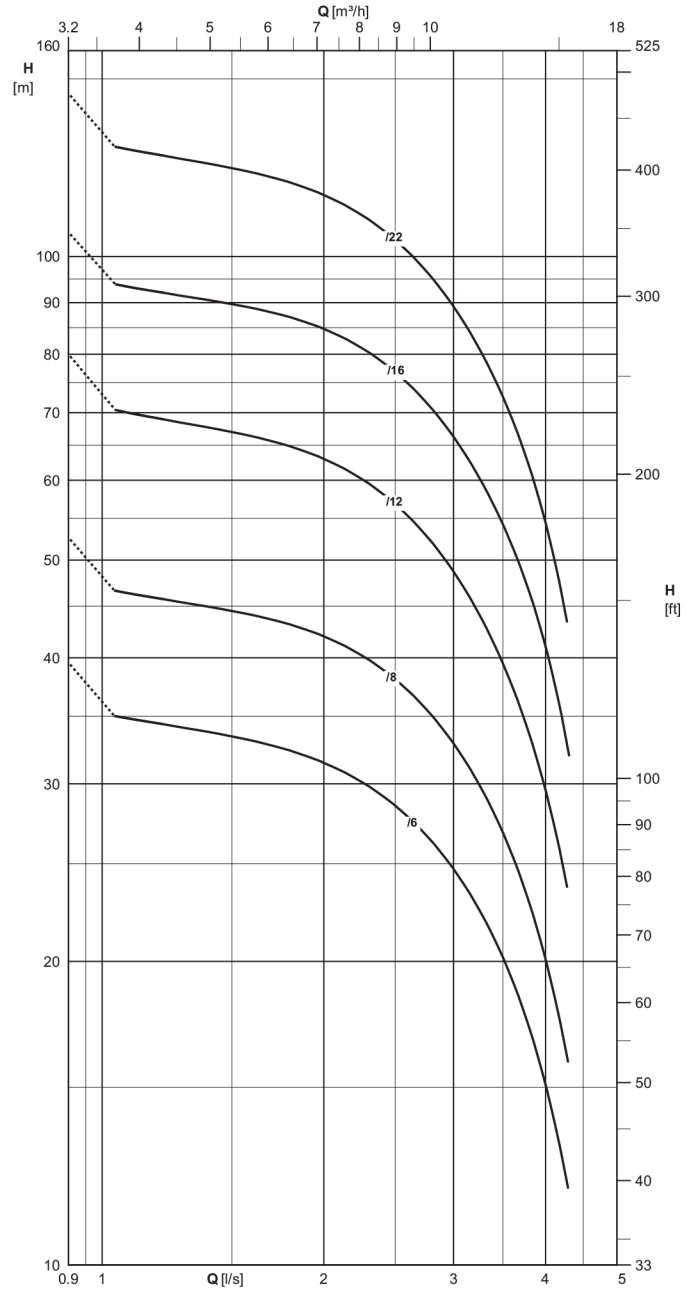

The hydraulic performance characteristics are guaranteed as conforming to standard UNI/ISO 9906 Grade 3B.

Les caractéristiques hydrauliques de fonctionnement sont garanties conformes à la norme UNI/ISO 9906 Niveau 3B.

Le caratteristiche di funzionamento vengono garantite secondo la norma: UNI/ISO 9906 Grado 3B.